

### Specifications

<p>Reflectance; di:8°, de:8° (diffused illumination, 8-degree viewing), equipped with simultaneous measurement of SCI (specular component included) / SCE (specular component excluded) Conforms to CIE No.15, ISO7724/1, ASTM E1164, DIN5033 Teil7 and JIS Z8722 condition C standard. Transmittance : di:0°, de:0° (diffused illumination, 0-degree viewing) Conforms to CIE No.15, ASTM E1164 and DIN5033 Teil7 standard.</p>	<p>Inter instrument agreement Mean <math>\Delta E^*ab</math> 0.15 (SCI) Average for 12 BCRA Series II color tiles compared to values measured with master body. UV adjustment Instantaneous numerical adjustment UV cut filter 400 nm cutoff and 420 nm cutoff</p>
<p>Light-receiving element Silicon photodiode array (dual 40 elements)</p>	<p>Transmittance chamber Width: 133 mm; depth: approx. 50 mm; measurement dia.: approx. 17 mm Transmission sample holder (Optional accessory): Sample holder for both plate-shaped and liquid samples (removable)</p>
<p>Spectral separation device Diffraction grating</p>	<p>Interface USB 1.1</p>
<p>Wavelength range 360 to 740 nm</p>	<p>Power AC100 to 240 V 50/60 Hz (Using included AC adapter)</p>
<p>Wavelength pitch 10 nm</p>	<p>Operating temperature/humidity range (*1) 13 to 33°C, relative humidity 80% or less (at 35°C) with no condensation</p>
<p>Half bandwidth Approx. 10 nm</p>	<p>Storage temperature/humidity range 0 to 40°C, relative humidity 80% or less (at 35°C) with no condensation</p>
<p>Reflectance range 0 to 200%; resolution: 0.01%</p>	<p>Size (WxHxD) CM-3600A 244 x 205 x 378 mm, CM-3610A 300 x 597 x 315 mm</p>
<p>Sphere size φ152 mm</p>	<p>Weight CM-3600A 11.5 kg, CM-3610A 16.5 kg</p>
<p>Light source 4 pulsed xenon lamps</p>	<p>*1 Operating temperature/humidity range of products for North America : 13 to 33°C, relative humidity 80% or less (at 31°C) with no condensation</p>
<p>Minimum interval between measurements Normal SCI/ SCE measurement: 4 sec. Transmittance measurement: 3 sec. UV-cut/ UV-adjusted measurement: 5 sec.</p>	<p>* Displays shown are for illustration purposes only. * The specifications and drawings given here are subject to change without prior notice. * KONICA MINOLTA and the Konica Minolta logo and the symbol mark, and "The essentials of imaging" are registered trademarks or trademarks of KONICA MINOLTA HOLDINGS, INC.</p>
<p>Measurement/illumination area LAV : φ25.4 mm/ φ30 mm } (Selectable) MAV : φ8 mm/ φ11 mm SAV : φ4 mm/ φ7 mm</p>	
<p>Repeatability When white calibration plate is measured 30 times at 10-sec. intervals after white calibration has been performed; Spectral reflectance: Standard deviation within 0.1% Colorimetric values: Standard deviation within <math>\Delta E^*ab</math> 0.02</p>	

### Worldwide support network



KONICA MINOLTA SENSING, INC.  
Konica Minolta Sensing Americas, Inc  
Konica Minolta Sensing Europe B.V.

Osaka, Japan  
New Jersey, U.S.A.  
European Headquarter /BENELUX  
German Office  
French Office  
UK Office  
Italian Office  
Swiss Office  
Nordic Office  
Polish Office  
SE Sales Division  
Beijing Branch  
Guangzhou Branch  
Chongqing Office  
Qingdao Office  
Wuhan Office

Phone : 888-473-2656 (in USA), 201-236-4300 (outside USA)  
Nieuwegein, Netherlands  
München, Germany  
Roissy CDG, France  
Warrington, United Kingdom  
Milan, Italy  
Dietikon, Switzerland  
Västra Frölunda, Sweden  
Wrocław, Poland  
Shanghai, China  
Beijing, China  
Guangdong, China  
Chongqing, China  
Shandong, China  
Hubei, China  
Singapore  
Seoul, Korea

Fax : 201-785-2482  
Fax : +31(0)30 248-1280  
Fax : +49(0)89 4357 156 99  
Fax : +33(0)1 493-84771  
Fax : +44(0)1925 711143  
Fax : +39 02 39011.223  
Fax : +41(0)43 322-9809  
Fax : +46(0)31 474945  
Fax : +48(0)71 734 52 10  
Fax : +86-(0)21-5489 0005  
Fax : +86-(0)10-8522 1241  
Fax : +86-(0)20-3826 4223  
Fax : +86-(0)23-6773 4799  
Fax : +86-(0)532-8079 1873  
Fax : +86-(0)27-8544 9991  
Fax : +65 6560-9721  
Fax : +82(0)2-523-9729

Konica Minolta (CHINA) Investment Ltd.  
KONICA MINOLTA SENSING, INC.  
Seoul Office

Addresses and telephone/fax numbers are subject to change without notice. For the latest contact information, please refer to the KONICA MINOLTA SENSING Worldwide Offices web page :

<http://konicaminolta.com/instruments/about/network>

©2011 KONICA MINOLTA SENSING, INC.

9242-4868-32 BBDAPK① Printed in Japan



# SPECTROPHOTOMETER NEW CM-3600A/CM-3610A

## Built for Precision. Compact yet powerful.



Plastics Textiles Paper Liquids Fine particles



### Outstanding Performance through Innovative Technology

#### CM-3600A Horizontal Spectrophotometer

- Highly accurate, reliable and rugged
- Versatile instrument for most colorimetric applications
- Simple operation

#### CM-3610A Vertical Spectrophotometer for best application support

- Speeds up textile and paper measurements
- Ideal for non-contact measurements such as powders, pigments
- Quick sample handling and measurement

The essentials of imaging



# Spectrophotometers CM-3600A and CM-3610A: High-Accuracy Color Measurement in the Laboratory and for Production



Spectrophotometers CM-3600A and CM-3610A inherit the innovative Konica Minolta Innovative Optical System technology used in the highly popular CM-3600d/CM-3610d, maintaining their high accuracy and excellent performance while offering USB communication and other improvements.

\* CM-3600A and CM-3610A are computer-controlled. Software such as optional SpectraMagic™ **NX** required.

## Simultaneous SCI/SCE measurement


By firing two xenon lamps in quick succession, the patented Numerical Gloss Control (SCI/SCE) system of the CM-3600A and CM-3610A eliminates the need for a mechanical gloss trap while providing virtually simultaneous SCI and SCE measurements and enabling the calculation of 8° gloss.

SCI: Specular component included  
SCE: Specular component excluded

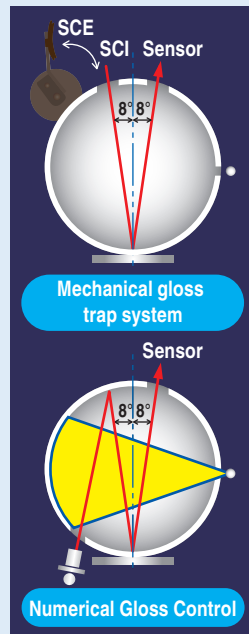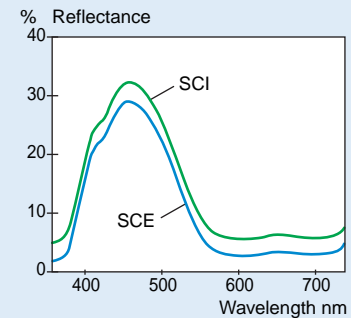

## UV adjustment for accurate measurements of fluorescent materials

Accurate measurement of materials such as paper or cloth treated with fluorescent whitening agents (FWA) requires precise control of the UV component and its effects. The Numerical UV Control method used by the CM-3600A and CM-3610A provides such control by combining results from flashes of two xenon lamps (one with full UV energy, the other with UV energy removed by a 400 nm or 420 nm UV-cutoff filter) using proprietary calculations. This method eliminates the need for mechanical filter positioning, and enables UV adjustment by Whiteness Index, Tint, Brightness, or UV profile.

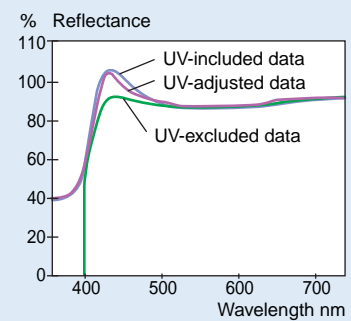

## CM-3600A: Compact footprint fits easily on your desk

The CM-3600A has about the same footprint as laptop computer or a sheet of B4 paper so it can fit easily where space is limited.



## CM-3610A unique features

The vertical-type CM-3610A retains most of the features of the CM-3600A plus some unique features.

Sample holder - Easier handling of sheet materials  
Direct measurement of powder materials



## Reflectance and transmittance in one instrument

The CM-3600A/CM-3610A can measure both the reflectance of opaque objects and the transmittance of transparent or translucent solid materials such as plastics. With accessories, the CM-3600A can even measure the transmittance of liquids.

\* Liquid measurements not possible with CM-3610A.



Reflectance Measurement: The CM-3600A/CM-3610A employs di:8°, de:8° geometry (diffuse illumination, 8° viewing) which conforms to ISO, CIE, ASTM, DIN, and JIS standards.

Transmittance Measurement: The CM-3600A/CM-3610A employs the d:0° geometry (diffuse illumination, 0° viewing), which conforms to ISO, CIE, ASTM, and DIN standards.

### Brighter, clear sample viewing system



Opening the sample viewer provides a clear, illuminated view of the sample at the measurement port. On the CM-3600A, this view is reflected in a mirror so that you can view it easily even while seated.

### Improved CM-3600A sample holder



Sample holder opens 90° for easy positioning of thick samples and is equipped with a "soft-close" mechanism that prevents it from slamming shut and possibly damaging samples.

### 3 measurement areas for diverse needs




Masks for the CM-3600A's three measurement areas (SAV: Ø4 mm, MAV: Ø8 mm, and LAV: Ø25.4 mm) are included as standard accessories, so you can select the one that fits your measurement requirements.

## SpectraMagic™ **NX** (Optional)

Supports Windows®XP/Vista/7

SpectraMagic™ **NX** enables you to perform comprehensive color inspection and analysis of incoming raw materials, in-process production, and outbound color-critical goods and materials in virtually any industry. With SpectraMagic™ **NX** you can insert digital images with measured data. Measure samples in any of 8 universally accepted color spaces. Select from 16 illuminants, and up to 40 indices to determine specific color and appearance properties, such as strength, brightness, haze, yellowness, opacity and whiteness. You can even configure up to 8 customized color equations. Reports range from simple Pass/Fail to trend charts, histograms, color plots, and spectral graphs. SpectraMagic™ **NX** comes with predefined templates, or you can create your own templates. For illustrations and explanations to understanding color and color measurement technology, there is a link to Konica Minolta's well-known and respected "Precise Color Communication", as well as step by step navigation help.

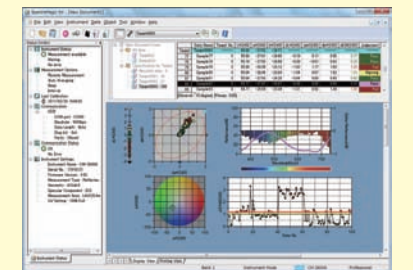

• Windows® is a trademark of Microsoft Corporation in the USA and other countries.