

OP940-SW

Insertion Loss & Return Loss Meter

Multifiber / Ribbon Testing

Overview

The **OP940-SW** is a multichannel insertion loss (IL) and return loss (RL) meter designed for testing ribbon cables and multi-pin termini. It features a color LCD screen, an optical reflectance scan mode, programmable pass/fail for editable test criteria and on screen context help. Additionally, the **OP940** can measure return loss (RL) at two positions simultaneously through the front panel and it offers expandable functionality. As with our other IL/RL systems, the **OP940** measures RL quickly and accurately without the need for mandrel wrapping or the use of index matching gel, and is available in Single Mode, Multimode, and FTTX variants.


By incorporating a high-quality MEMS optical switch, the **OP940-SW** is able to quickly and accurately test multichannel cables. It can be built with 4 and up to 24 channels and all source connectors are easily accessible to minimize downtime on high volume production lines in case of optical endface damage.



Model OP940-MM-SW24-8513-R Insertion and Return Loss Test Set designed for testing multifiber multimode cables

Features

- Measures Multifiber and Ribbon Cables in Seconds
- Produces All-In-One Cable Datasheet
- Front Panel Optical Reflectance Trace for each Channel
- Set Return Loss Reference Position and Value
- Measures Return Loss at Multiple Connection Points through the Front Panel
- Programmable Pass/Fail
- Expandable Functionality
- On Screen Help
- Configurable Timer Settings, such as Dwell Times
- User Accessible Source Connectors
- Easy to Use
- Single Mode, Multimode, FTTX

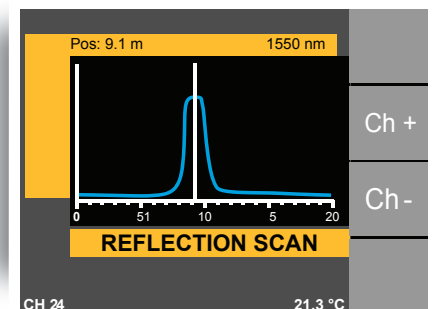

Scan mode with reflection at 9.1m

SPECIFICATIONS

Optical Power Meter	1mm InGaAs	3mm InGaAs	5mm InGaAs	10mm InGaAs	3mm Silicon
Measurement Range	+6dBm to -72dBm at 1490nm	+3dBm to -72dBm at 1490nm	0dBm to -65dBm at 1490nm	0dBm to -55dBm at 1490nm	0dBm to -65dBm at 980nm
Wavelength Range	850nm to 1650nm				400nm to 1100nm
Selectable Wavelength	Standard wavelengths (850nm, 980nm, 1300nm, 1310nm, 1490nm, 1550nm, 1625nm)				Standard wavelengths (650nm, 850nm, 980nm)
Measurement Resolution (Display)	0.001dB				
Absolute Accuracy	±0.25 dB at calibration conditions for all NIST traceable wavelengths				
Measurement Linearity (Relative Accuracy)					
Deviation ± 0.05dB	+3dBm to -65dBm at 1490nm	0dBm to -65dBm at 1490nm	0dBm to -55dBm at 1490nm	0dBm to -45dBm at 1490nm	0dBm to -55dBm at 980nm
Deviation ± 0.01dB	<10dB power variation	<10dB power variation	<10dB power variation	<10dB power variation	<10dB power variation

Return Loss	1310nm/1550nm	1310nm/1490nm/1550nm/1625nm	850nm/1300nm
Source Wavelength	1310nm, 1550nm	1310nm, 1550nm, 1490nm, 1625nm	850nm, 1300nm
Calibrated Measurement Range	-10dB to -80dB	-10dB to -80dB	-10dB to -58dB
Measurement Linearity	±1dB (-12dB to -72dB)	±1dB (-12dB to -72dB)	±1dB (-10dB to -45dB)
Distance Range	100 meters (standard)/ 2500 meters (Rep Rate adjusted)	100 meters (standard)/ 2500 meters (Rep Rate adjusted)	100 meters (standard)/ 2500 meters (Rep Rate adjusted)

Insertion Loss	1310nm/1550nm LASER	1310nm/1490nm/1550nm/1625nm LASER	850nm/1300nm LED
Source Center Wavelength	±30nm from nominal	±30nm from nominal	±30nm from nominal
Source Bandwidth	<10nm	<10nm	<140nm
Internal Fiber	9/125µm (SMF28)	9/125µm (SMF28)	50/125µm, 62.5/125µm, 105/125µm
Launch Condition	N/A	N/A	Available upon request
Output Power	Typical -1.5dBm	Typical -2.5dBm	-18dBm: 62.5/125µm
Source Stability*	±0.02dB	±0.02dB	±0.02dB

* Over 1 hour with a max. change of 1°C

Laser Classifications

All **OP930 Insertion Loss and Return Loss Test Sets** utilize a **Class I Laser Source**. Unless otherwise noted, all **OP250**, **OP715**, and **OP750** source units with internal laser sources utilize a **Class I Laser Source**. Unless otherwise noted, all **OP815** and **OP850 Insertion Loss Test Sets** with internal laser sources utilize a **Class I Laser source**. All **OP280 Visual Fault Finder** units utilize a **Class III Laser Source**.

OptoTest strongly suggests that all necessary precautions be taken whenever any Class I or Class III laser source is used.

Specifications are subject to change, please confirm specific performance characteristics of the product at the time of ordering. All specifications are valid within temperature range of 18°C to 24°C unless otherwise noted. For additional specifications please contact OptoTest.